




**FITTING INSTRUCTIONS FOR CP0243BL CRASH PROTECTORS
KYMCO KR125 SPORT 2008**



TOWARDS REAR
OF BIKE



TOWARDS FRONT
OF BIKE

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

You will need the following tools to complete this job.

**Socket set to include 17mm, 12mm, 8mm A/F sockets, a 6mm Allen key and a Phillips screwdriver.
Torque wrench to be used at 40NM.**

Left-hand side (as you sit on bike)


- Remove the upper fairing from both sides of the bike.
- Remove the horn from its mounting on the frame.



- Undo the two bolts that hold the breather pipes to the side of the engine (see picture above)



- Fit the mounting bracket (see picture above) to the frame using the M8x20mm long cap head bolt, with a 8mm washer under the head of the bolt.

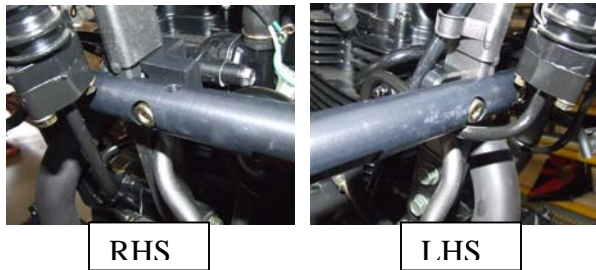

- Fit the bar across the front of the frame just under the oil cooler, so that the two cut outs fit over the frame. Note the end with the two counter bored holes goes on the right hand side of the frame.
- Take one of the M8x30mm long cap head bolts and slide a 8mm washer up to the head, and loosely fit the bar to the bracket that you fitted earlier on the right hand side.
 - Take the remaining clamp and place it over the frame on the left hand side.



- Take the two remaining M8 cap head bolts and washers and fit the bar to the clamp and tighten, see picture above.
- Tighten the bolt on the left hand side.
- Refit the breather pipes to the side of the engine.



- Refit the horn onto the bar using the oem bolt, see picture above.



- Refit the upper fairings. If you wish to keep the mesh on the fairing you will have to cut a hole to allow the bar to go through. (See picture above) If you do not want to cut the mesh just remove it from the fairing.
- For both sides place washer and shake-proof washer from kit onto the M10x60mm long hex head bolt from kit (ensure plain washer is against bolt head and shake-proof washer will be against bobbin face on assembly), fit through bobbin so bolt head goes into counter-bore.
- Offer this assembly up to the bar and tighten bolt until you feel some compression from inside the protector using 17mm socket and wrench. **PLEASE NOTE BOBBIN MUST BE POSITIONED AS PICTURED ABOVE WITH BIGGER END TOWARD FRONT OF BIKE.** Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not over tighten as damage can occur to the bike. Do not exceed 40nm of torque.
- When both protectors are tight fit the caps to them.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 5K, Blacknest Industrial Park, Blacknest Road, Alton, Hampshire, GU34 4PX

Tel: +44 (0)870 220 6380 Fax: +44 (0)1420 521101 www.rg-racing.com Email: info@rg-racing.com